

12 **EUROPEAN PATENT APPLICATION**

21 Application number: 89480142.2

51 Int. Cl.<sup>5</sup>: G06F 9/46 , G06F 15/403

22 Date of filing: 12.09.89

30 Priority: 28.10.88 US 264289

43 Date of publication of application:  
02.05.90 Bulletin 90/18

84 Designated Contracting States:  
DE FR GB

71 Applicant: International Business Machines Corporation  
Old Orchard Road  
Armonk, N.Y. 10504(US)


72 Inventor: Arnold, Michael Edward  
126 Sylvan School Road  
Snow Camp, NC 27349(US)

74 Representative: Bonneau, Gérard  
Compagnie IBM France Département de  
Propriété Industrielle  
F-06610 La Gaude(FR)

54 Method for comparing and swapping data in a multi-programma data processing system.

57 The method for comparing and swapping data which are located in discontiguous locations in a data processing system, comprises the steps of comparing first and second operands which are located in memory, and if said first and second operands are equal, loading the value at a fourth operand into a third operand located in memory, then setting an indicator in memory that the first and second operands are equal, and performing a serialization process on the second operand location prior to the time the second operand is fetched, whereby a value is fetched from one location in memory dependent on the fact that the value at another location does not change.

FIG. 1

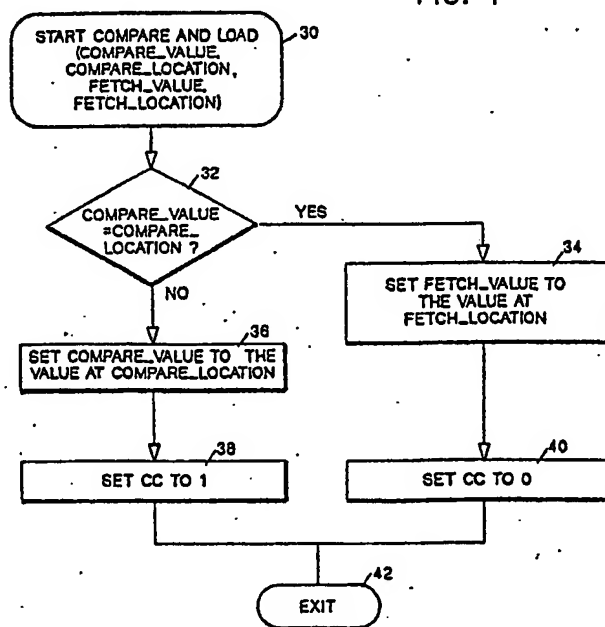

# METHOD FOR COMPARING AND SWAPPING DATA IN A MULTI-PROGRAMMING DATA PROCESSING SYSTEM

The invention relates to the manipulation of time-ordered lists in multiple processing units or multiple programmed computing systems, and more particularly a method for comparing and swapping data enabling the addition or deletion of items without a locking mechanism, even when multiple processing units have asynchronous access to the lists.

5 The invention deals with both queues as well as stacks. In a queue, also termed a FIFO (first-in, first-out) list, the first item added to the list is the first to be removed. In a stack, also termed a LIFO (last-in, last-out) list, the last item added to the list is the first to be removed. Asynchronous manipulation of FIFO and LIFO lists is very common in operating system and sub-systems environments. The limitations imposed on these environments by the inability to quickly and easily manipulate time-ordered lists are becoming  
10 excessive. As the number of processors used in tightly coupled complexes continues to increase, the cost of serialization by software will also increase. Because of the high utilization of time-ordered lists, this cost is becoming prohibitively expensive.

Currently, there are two common methods of maintaining a FIFO list. For a single headed queue, the list is defined as having one anchor point, all elements are added using this point and are deleted by  
15 searching down the list and removing the last element. This method allows for multiple adders, but only a single deleter. It also requires that the deleter searches to the end of the list, which may cause the deleter to be interrupted by page faults. The overhead associated with page faults that may be incurred can become excessive with long lists.

For a double headed queue, the list is defined as having two anchor points, and all elements are added  
20 using one point and deleted using the other. This second method only allows one adder or deleter to be accessing the list at a time. To assure that only one access is allowed at a time, some method of serialization (a locking mechanism) must be employed.

The first method may be impractical because of the performance implications of excessive paging. The second method has the restriction that a lock must be used; this requirement can also contribute to  
25 performance degradation.

The most common technique of monitoring a LIFO list is to set one anchor point in a stack and adding (pushing) and deleting (popping) all elements using this anchor point. The IBM System/370 Extended Architecture Principles of Operation, (IBM Publication No. SA22-7085-0), hereinafter referred to as the 370XA Prin. Ops on page A45, gives the example of providing for multiple asynchronous unlocked adders  
30 and deleters.

Other specific examples of prior art systems and methods include U.S. patents 4,394,727 and 4,320,455, and the article by Conroy in the IBM Technical Disclosure Bulletin, Vol. 24, Nov. 1981, pages 2716 to 2723, all of which involve the use of a lock bit or lock word.

One technique for avoiding the use of locking mechanisms in some instances in multi-processing or  
35 multiprogrammed computing systems is described in US Patent 3,886,525. This technique includes the invention of a new instruction at that time called "Compare and Swap." Using this instruction, each user of shared data is permitted to access it at its addressable location in the shared data store for further processing by the sequence of program instructions. After processing, the processed data is to be returned to the address location of the shared data. Prior to returning the processed data to the address location in  
40 the shared data store, the new instruction is accessed in the sequence of instructions. Using "Compare and Swap," the data content of the addressed location accessed by the instruction is compared with the data accessed from the addressed location prior to the processing. As a result of this comparison, it can be determined that during the period of processing on the shared data, another user has or has not also accessed the shared data for processing, and returned a different value of the shared data back to the  
45 addressed storage location. If, in response to the "Compare and Swap" (CS) instruction, it is determined that the value of the addressed location has been modified by another user, the modified value is retained by the user and the processing is reinitiated on the modified value. If the value of the data in the addressed location accessed by the CS instruction is still identical to the value of the data accessed by the user prior to processing, it can be determined that no other user had accessed shared data and modified it. Therefore,  
50 the processed data will be transferred to the addressed location and further processing permitted.

The "Compare and Swap" (CS) and its companion "Compare Double and Swap" (CDS) instructions are now used in multi-programming and multi-processing environments to serialize access to counters, flags, control words and other common storage areas. The 370XA Prin. Ops shows a sample of the use of CS and CDS instructions. Probably the most significant point to note is that functions can be performed by

programs running enabled for interruption (multi-programming) or by programs that are running on a multi-processing configuration. In other words, the instructions CS and CDS allow a program to modify the contents of a storage location while running enabled, even though the routine may be interrupted by another program on the same CPU that will update the location, and even though the possibility exists that another CPU may simultaneously update the same location.

5 The CS instruction first checks the value of a storage location and then modifies it only if the value is what the program expects; normally, this would be a previously fetched value. If the value in storage is not what the program expects, then the location is not modified; instead, the current value of the location is loaded into a general register in preparation for the program to loop back and try again. During the  
10 execution of CS, no other CPU can access the specified location.

When a common storage area larger than a doubleword is to be updated, it is usually necessary to provide special interlocks to ensure that a single program at a time updates a common area. Such an area is called a serially reusable resource (SRR). In general, updating a list or even scanning a list, cannot be safely accomplished without locking the list. However, the CS instructions can be used in certain restricted  
15 situations to perform the lock/unlock functions and to provide sufficient queuing to resolve contentions, either in a LIFO or FIFO manner. A lock/unlock function can then be used as the interlock mechanism for updating an SRR of any complexity.

The lock/unlock functions are based on the use of a "header" associated with the SRR. The header is the common starting point for determining the states of the SRR, either free or in use, and also is used for  
20 queuing requests when contentions occur. Contentions are resolved using "Wait and post". The general programming technique requires the program that encounters a "lock" SRR must "leave a mark on the wall," indicating the address of an ECB on which it will Wait. The "unlocking program" sees the mark and Posts the ECB, thereby permitting the Waiting program to continue. In most cases, all programs using a particular SRR must use either the LIFO queuing scheme or the FIFO scheme; the two are not mixed.  
25 When more complex queuing is required, the suggestion in the 370 XA Prin. Ops manual is that the queue for the SRR delocks using one of the two methods shown.

As noted, the CS & CDS instructions have been used quite successfully. They enable users to obtain access to shared data or headers for the purpose of further processing. The need to prevent access to the addressed location when another user is processing data is eliminated by the CS instruction. However, the  
30 CS and CDS instructions apply only to a single word or a double word.

In contrast, as will be explained, the "Compare and Swap Disjoint" (CSD) and "Compare and Load" (CAL) instructions of this invention enable the referencing of two non-adjacent words (or double words in an expanded version).

It is therefore an object of the invention to allow unlocked asynchronous access to lists by multiple  
35 processing units or users, while maintaining the integrity of the lists.

The object of the invention is achieved by novel procedures which include the creation of novel computer instructions, viz., "Compare and Swap Disjoint" and "Compare and Load." The use of these memory-access-serialization instructions allows unlimited asynchronous manipulation of these lists by any number of adders and deleters. The method also allows the addition and deletion of elements to a time-  
40 ordered list of either FIFO or LIFO types by multiple processors while maintaining list integrity. The term "disjoint" means that the two words being acted upon are not adjacent to each other in storage. Another term for "disjoint" is "discontiguous".

The novel "Compare and Load" (CAL) instruction compares data in a first register with an address location and fetches into a second register the value from a second location based on the equality of the  
45 comparison. The advantage of this is that one can fetch a value from a location dependent on the fact that the contents of another location have not changed.

The novel "Compare and Swap Disjoint" (CSD), as distinguished from the "Compare and Swap" (CS) instruction and the "Compare Double and Swap" (CDS) instructions, enables the program to refer to two non-adjacent words or double words; i.e., it allows for the simultaneous updating of two disjoint  
50 (discontiguous) storage locations. This aids in list manipulation because one must deal with two disjoint entities in many practical situations.

A preferred embodiment of the invention is now described in reference to the accompanying drawings wherein :

Fig. 1 is a flow diagram showing the operation of the novel "Compare and Load" Instruction.

55 Fig. 2 is a flow diagram showing the operation of the novel "Compare and Swap Disjoint" instruction.

Fig. 3 illustrates a double-headed queue FIFO list and the result obtained after the manipulation of the list by the invention.

Figs. 4A and 4B are flow diagrams illustrating the method according to the invention of deleting an

element from the double-headed queue shown in Fig. 3.


Fig. 5 illustrates adding an element to a double-headed queue in accordance with the invention.

Fig. 6 is a flow diagram showing the method of enqueueing the elements of Fig. 5.

Fig. 7 illustrates a LIFO queue list and the result obtained after the manipulation of the list by the invention.

Fig. 8 is a flow diagram illustrating the method according to the invention of deleting an element from the stack shown in Fig. 7.

The specification begins with the description of the two novel instructions and their operation "Compare and Load" and "Compare and Swap Disjoint." The instructions are written in the format of the 370-XA Prin. Ops. but the methods have more general applications. COMPARE AND LOAD ("CAL"); R1,D2(B2),R3,D4-(B4)

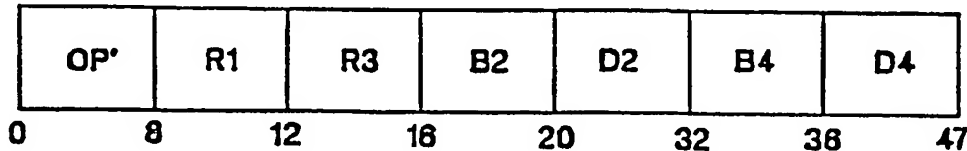

The foregoing description is set forth in relation to Fig. 1 of the drawing and the CAL format.

The addressable data specified by the Compare and Load instruction is depicted as follows

The operation code in binary bits 0-7 will be decoded to signify the Compare and Load instruction. Four different operands are identified by address information in the remaining portions of the instruction. The five binary bits 8-11, designated R1, identify a general purpose register containing operand 1. The binary bits 12-15, designated R3, identify the general purpose register containing the processed data or operand 3. Binary bits 16-19, labeled B2, identify a general purpose register which contains base address information to which binary bits 20-31 of the instruction, labeled D2, are added to identify the addressed location in shared storage. Binary bits 32-35, labeled B4, identify a general purpose register which contains base address information to which binary bits 36-47, labeled D4, are added to identify the addressed location in shared storage.

In block 30, Compare\_Value is Operand 1, R1, Compare Location is Operand 2, D2(B2), Fetch\_Value is Operand 3, R3 and Fetch\_Location is Operand 4, D4(B4). As will be discussed with respect to the queue manipulation processes, the two discontinuous or disjoint elements are, e.g., the head of a list and another element in the list.

The fullword at the second-operand location in storage D2(B2) is compared with the first operand in R1 as shown in block 32 in Fig. 1. If they are equal, then the program fetches into the register the third operand R3, the fullword at the location defined by the fourth operand D4(B4) in storage as the base/displacement as shown in block 34. The Condition Code is set to 0 as shown in block 4.

In decision block 32, if the fullword at the second-operand location is not equal to the first operand, then the first operand is set equal to the second operand, the third operand remains unchanged, as shown in block 36, the fourth operand is not used; and the condition code (CC) is set to 1, as shown in block 38.

R1 and R3 each represent any general register means. The second and fourth operands are fullwords in storage designated on a word boundary.

Access exceptions are not recognized against the fourth operand if the second operand is not equal to the first. (In other words, no reference to the fourth operand location is made.)

When the second operand D2(B2) in storage is equal to the first operand in R1, no access by another CPU to the second operand is permitted between the moment that the second operand is fetched and the fourth operand is fetched. This type of step is commonly referred to as storage access serialization.

Serialization on each operand location is performed in step 32 before the value in that location is fetched, and again after the operation is completed. CPU operation is delayed until all previous accesses by this CPU to storage have been completed, as observed by channels and other CPUs, and then the second operand is fetched. If the comparison of the first and second operands are equal, then the fourth operand (D4)B4 is fetched. No subsequent instructions or their operands are accessed by this CPU until the execution of the CAL instruction is completed.

Resulting Condition Code (CC):


0 First and second operands are equal, and the third operand has been replaced by the fourth operand.

1 First and second operands are unequal. The first operand has been replaced by the second operand. The third and fourth operands are unchanged.

5 2 --  
3 --

### Program Exceptions

- 10 - Access (fetch and store operands 2 and 4)  
- Operation  
- COMPARE AND SWAP DISJOINT (CSD)  
CSO R1,D2(B2),R3,D4(B4)

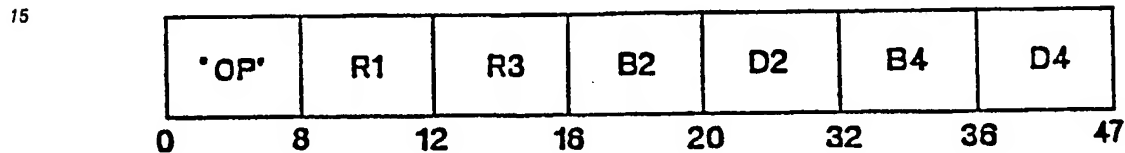

Referring to Fig. 2, the CSD process begins in block 50 with the general purpose being to compare the first and second operands and then the third and fourth operands under certain conditions. The first operand R1 and the second operand D2(B2) in storage are compared in decision block 52. If they are equal, the third operand in R3 and fourth operand D4(B4) in storage are compared in decision block 58. If they are also equal, the R1+1 operand (Replace Value 1) is stored at the second operand location (Location\_1), and the R3+1 operand (Replace\_Value\_2) is stored at the fourth operand location as shown in block 64. The Condition Code is set to 0 as shown in block 66.

If the first operand R1 and the second operands D2(B2) are unequal, the second operand is loaded into the first operand in block 54. If the first and second operands are equal, and the third and fourth operands are unequal as decided in block 58, the fourth operand is loaded into the third operand as shown in block 60. The CC is set to 2 as shown in block 62.

R1 and R3 each represent an even-odd pair of general registers and designate an even-numbered register. R1+1 and R3+1 represent the odd-numbered register of the pair. The second operand D2(B2) and fourth operand D4(B4) are words in storage.

When the result of the comparison of the first and second operands is unequal, the second operand remains unchanged, and the fourth operand is not accessed. When the result of the comparison of the third and fourth operands is unequal, the second and fourth operands remain unchanged. Access exceptions are not recognized against the fourth operand if the first and second operands are unequal.

When both comparisons done in blocks 52 and 58 are equal, no access by another CPU to the second-operand or fourth-operand location is permitted between the moment that the respective operand is fetched for comparison and when it is stored.

Serialization on each operand location is performed before it is fetched in blocks 52 and 58, and again after the operation is completed at block 68. CPU operation is delayed until all previous accesses by this CPU to storage have been completed, as observed by channels and other CPUs, and then the second operand is fetched at block 52.

If the first and second operands are equal, then the fourth operand is fetched at block 58. No subsequent instructions or their operands are accessed by this CPU until the execution of the CSD instruction is completed, including placing the result values, if any, in storage, as observed by channels and other CPUs.

The second and fourth operands are designated on a word boundary. The R1 and R3 fields each designate an even register. Otherwise, a specification exception is recognized.

### 55 Resulting CC:

0 First and second operands are equal, and third and fourth operands are equal. The second and fourth operands have been replaced.

1 First and second operands are unequal. The first operand has been replaced by the second operand. The third and fourth operands are unchanged.

2 First and second operands are equal, but the third and fourth operands are unequal. The third operand has been replaced by the fourth operand. The first and second operands are unchanged.

3 --

#### Program Exceptions:

- Access (fetch and store, operands 2 and 4)

- Specification

- Operation

Now, the following illustrates of how the novel instructions may be productively used in the manipulation of time-ordered lists or queues. The queue is defined as having head and tail pointers. The elements are added to the tail and taken from the head of the queue. Fig. 3 illustrates the deletion of an element from a double-headed queue. As stated, the queue is defined as having Q\_head (Q\_head) and Q\_tail (Q\_tail) where the Q\_head points to the newest element in the queue and the Q\_tail points to the oldest element in the queue. The solid lines show the list as it exists before it is manipulated. Given a representative queue with elements added in this order, A, B and C, to effect the deletion of element A, the Q\_head pointer must be changed to point to element B as shown by the dotted line.

The method of accomplishing this in accordance with the invention is illustrated in Figs. 4A and 4B and in that portion of instructions in Table II in this specification which relate to DEQUEUEING.

The queue is defined as having head and tail pointers. The elements are added to the tail and taken from the head of the queue.

The principal result of the method enables the replacement of the pointer in the Q\_head and the replacement of the next pointer in element A without any possibility of modifications. This ensures that list integrity is maintained during the manipulation of the list.

#### LIST MANIPULATION

Following is a detailed description of allowing multiple processes to DEQUEUE and ENQUEUE elements concurrently, without having to hold a lock or to wait on an event control block (ECB), while still ensuring that the queue will not be corrupted. This is achieved by including the CAL and CSD instructions in the programs.

The QUEUE is defined as having Head and Tail pointers. The elements are added to the tail and taken from of the head of the queue. The functional definition is the same as a double headed queue in Figs. 3 and 4. See the 370/XA Prin. Ops. for a description of the instructions used below.

TABLE 1

Assume the following declarations:

5

- |    |          |       |              |  |
|----|----------|-------|--------------|--|
| 1. | QUEUE    | DS    | OF           |  |
| 2. | QHEAD    | DC    | A(0)         | Pointer to the head of the queue         |
| 3. | QTAIL    | DC    | A(0)         | Pointer to the tail of the queue         |
| 4. | *        |       |              |  |
| 5. | ELEMENT  | DSECT |              | A Queue Element                          |
| 6. | NEXT     | DS    | A            | Pointer to the next element on the queue |
| 7. | ELEMENTL | EQU   | *-ELEMENT    | Length of ELEMENT                        |
| 8. | *        |       |              |  |
| 9. | NEWLEM   | DS    | CL(ELEMENTL) | A new element to add to the Queue        |

20

DEQUEUEing an element from the QUEUE. (Refer to Fig. 4 for the flow diagram.)

25

- |    |         |     |                              |   |
|----|---------|-----|------------------------------|---|
| 1. | DEQUEUE | L   | R2,QHEAD                     | Get the pointer to Head                 |
| 2. | DEQ1    | LTR | R2,R2                        | Anything there? (Load and Test)         |
| 3. |         | BZ  | DEQEXIT                      | No, so exit                             |
| 4. |         | CAL | R2,QHEAD,R4,NEXT-ELEMENT(R2) | Set R4 QHEAD @NEXT                      |
| 5. |         | BC  | 4,DEQ1                       | QHEAD changed, so try again             |
| 6. | DEQ2    | LTR | R4,R4                        | Was the first element the only element? |
| 7. |         | BNZ | DEQ3                         | No, So Dequeue with CSD                 |

40

45

50

55

8.	LR	R5,R4	Yes, R5=R4=0
9.	LR	R3,R2	The Tail MUST equal the Head pointer
10.	CDS	R2,R4,QUEUE	Replace the queue pointers with zero
5	11.	BC	4,DEQ1 If it didn't work, then try again
	12.	B	DEQEXIT It worked, so indicate success and exit
	13.	DEQ3 LR	R3,R4 Use the NEXT field to replace the QHEAD
10	14.	SLR	R5,R5 Replace the Next field with zero
	15.	CSD	R2.QHEAD,R4,NEXT-ELEMENT(R2) Update pointers
	16.	BC	4,DEQ1 R2 =QHEAD, try again
	17.	BC	2,DEQ2 R4 =NEXT, try again
15	18.	DEQEXIT DS	OH If DEQUEUED R2=Element ELSE R2=0

20

ENQUEUEing an element to the QUEUE.

(Refer to Fig. 6 for the flow diagram.)

25

1.	ENQUE	LA	R5,NEWELEM	Get the address of the new element
2.	ENQ1	LM	R2,R3,QUEUE	Get the QHEAD & QTAIL pointers
30	3.	LTR	R2,R2	Is there anything on the QUEUE
	4.	BNZ	ENQ2	Yes, so do normal enqueue
	5.	LR	R4,R5	No, QHEAD & QTAIL must point to the New Element
35	6.	CDS	R2,R4,QUEUE	Update the pointers
	7.	BC	4,ENQ1	It didn't work, so try it again
	8.	B	ENQEXIT	It did work, so exit
40	9.	ENQ2	LR	R2,R3 Pointer to Tail of QUEUE
	10.	LR	R3,R5	Pointer to New Element
	11.	SLR	R4,R4	Current Tail Element has a zero NEXT pointer
45	12.	CSD	R2,QTAIL,R4,NEXT-ELEMENT(R2)	Update the pointers
	13.	BNZ	ENQ1	It didn't work, try again
	14.	ENQEXIT DS	QH	

50

Turning now to Fig. 4A, the program, DEQUEUE, removes an element from a double-headed FIFO list in accordance with my invention. The first step in the program, as shown in block 231, is to atomically load the Q\_head and Q\_tail with elements if there are any to be loaded. The program proceeds to block 232 to decide whether the queue is empty. If the answer is yes, the dequeue program is exited as shown in block 233. If the answer is no, the Compare and Load routine in block 234 is used to fetch the value of the next pointer from the oldest work element while making sure the Q\_head does not change.

The next step in the process is to determine whether the Q\_head pointer had changed as shown in decision block 235. If the answer is yes, the routine returns to decision block 232 to try to dequeue the next



element.

CAL is used to fetch the value of the next pointer from the first element on the chain as addressed by the Q\_head. This operation is performed while ensuring that that element has not been removed by another process executing the same CAL or dequeue operation. If it is detected that the Q\_head has  
 5 changed, which indicates that someone else has removed an element from the list, then the program must refetch the next query location as described above. If in fact the Q\_head did not change, then the program does hold a valid next pointer location.

The next step in the process is to test the next pointer fetched according to block 234. If the next pointer was not zero, then more than one element exists, as determined in block 236, and the program then  
 10 sets the replacement value for the Q\_head to the next pointer fetched in block 234. In block 237 the program sets the Q\_tail value to the same value as the Q\_head value. While making sure the Q\_head and Q\_tail do not change (atomically), the Q\_head and Q\_tail are replaced with zeros. If, on the other hand, the Q\_head or Q\_tail changed, the program returns to block 232 to test the Q\_head again. If the Q\_head and Q\_tail did not change, then the program is exited with either zero or the address of the  
 15 dequeued element as shown in block 243.

Turning to block 240 in Fig. 4B, while ensuring that the Q\_head and next field do not change, the program replaces the value of the Q\_head with the value of the second oldest element on the queue and replaces the value of the next pointer to zero. As indicated in the drawing, this is the use of the Compare and Swap Disjoint (CSD) instruction. In decision block 241 a decision is made as to whether the Q\_head  
 20 pointer had changed. If the pointer had changed the program returns to decision block 232 to determine whether or not the queue is empty. If the Q\_head pointer had not changed, the program proceeds to decision block 242. The dequeue routine is exited as shown in block 243. This exit occurs with either zero or the address of the dequeued element.

Returning to decision block 236, if there had been only one element in the queue and if the Q\_head  
 25 and Q\_tail have not changed since loading, then they are both set to zero. The program then proceeds to decision block 238 to determine whether the Q\_head and Q\_tail changed. If the Q\_head and Q\_tail had changed, the process returns to step 232 to determine if the queue is empty. However, if the Q\_head and Q\_tail had not changed, the program is exited with the address of the dequeued element.

In using the CSD, the DEQUEUE program replaces the value of the Q\_head and the value of the next  
 30 pointer location on the first element of the chain, ensuring that they have not changed. CSD then replaces them with the address of the second element on the chain and with zero, respectively, ensuring that both the Q\_head and the next pointer have not changed.

If the Q\_head pointer changed or the next pointer changed, that indicate that either another element was added to the chain or during the time between the CAL and the CSD that someone else has removed  
 35 an element from this queue. At that point the program reperforms the CAL instruction as shown above. If neither pointer changed, then the first element on the queue has now been removed and the process is successful.

Fig. 5 illustrates the addition of an element to a double-headed queue. The queue is defined as having a Q\_head and a Q\_tail, where the Q\_head points to the oldest element in the queue and the Q\_tail  
 40 points to the newest element in the queue. Given a representative queue with elements added in this order: A, B and C, to effect the addition of element N, the Q\_tail pointer must be changed to point to element N and the pointer from element C (C next pointer) must be changed to also point to element N.

Fig. 6 is a flow chart of this a novel method of enqueueing. The example in this case is to add an element to a double-headed FIFO list as illustrated schematically in Fig.

45 5. The detailed set of instructions relating to the flow diagram of Fig. 6 are in the second part of Table 1.

As shown in block 100, the Q\_head and the Q\_tail pointers are fetched atomically. In decision block 102 the Q\_head is tested to determine whether the queue is empty. If the queue is not empty, the program proceeds to block 106 where a new element is added to a non-empty list. The address of the Q\_tail and  
 50 the address of the new element is established. A register means is used to ensure that the last element stays as the last element in the queue. The program next proceeds to decision block 108 where a decision is made whether the Q\_tail or the next pointer have changed. If neither has changed, the program exits the enqueue routine. If the Q\_tail or next pointer has changed, the program returns to block 100 and the program begins again at that point. If neither the Q\_tail nor the next pointer changed, that means that a  
 55 new element has been successfully added to the queue and the program exits enqueue as shown in block 112.

If the result from decision block 108 indicates that the Q\_tail or the next pointer of the last element has changed since being fetched, the process must start again at block 100. If the answer is no, the queueing

process is complete and the program is exited at block 112.

Returning now to block 102, if the queue is empty, the program proceeds to block 104. A new element is added, and both the Q\_head and Q\_tail pointers point to the new element as shown in block 104. As shown in the flow diagram, this step is done atomically as the word has been defined in this specification. In block 110, a decision is made as to whether contents of the Q\_head and Q\_tail have changed since pointing to the new element. As shown in decision block 110, if they have not changed, the program exits the enqueue routine. If the Q\_tail or the next pointer of the last element did change, the program returns to block 100 to start the procedure again.

To recapitulate, block 106 represents the CSD instruction, which ensures that while the Q\_tail pointer still points to element C, the CSD instruction compares register operand 1 with location operand 3. If they are equal, the program replaces the value in location operand 3 with the value in register operand 2. If they are not equal, then register operand 1 gets the value at location operand 3 and the condition code is set.

Note what the CSD instruction does in comparison with the CS and its companion compare double and swap instructions. Compare and Swap and Compare Double and Swap compares and replaces one location, either a fullword or a doubleword respectively at that one location. CSD and its companion Compare Double and Swap Disjoint will conditionally replace two disjoint elements, either a fullword or a doubleword, respectively at two disjoint locations. Compare and Swap compares only one storage location and replaces that storage conditionally whereas Compare and Swap Disjoint will compare one location, then compare a second location conditional on the equality of the first location; if both of the quality conditions are met, then both locations are replaced. The advantage of this is that one can manipulate both the queue or stack and also the first element in the list at the same time while maintaining list integrity (absence of list integrity means that an element could be lost, for example).

#### List Manipulation of a Stack (a LIFO List)

Fig. 7 illustrates the removal of an element from a Stack, where the process removes element A from the stack.

The stack is defined as having a TOS (Top of Stack pointer). The elements are added to the TOS and taken off from the TOS.

Given a Stack represented by a top of stack pointer (TOS) and a representative selectino of elements A, B and C which were pushed onto the stack in the order of C, B, A, to remove (or pop) the first element from the stack you replace the value in the top of stack with the address of B, the second element in the stack, and return the value of the address of A.

The technique allows multiple processes to POP (remove from the stack) elements concurrently, without having to hold a lock, or wait on an ECB and all without any possibility that the Stack will be corrupted. The technique is described in Table 2 and in Fig. 8.

TABLE 2

Assume the following declarations:

5

1.	STACK	DS	OF	
2.	TOS	DC	A(0)	Pointer to the top of the stack
3.	*			
10	4.	ELEMENT	DSECT	A Stack Element
	5.	NEXT	DS	A
				Pointer to the next element on the stack
	6.	ELEMENTL	EQU	*-ELEMENT
				Length of ELEMENT
15	7.	*		
	8.	NEWELEM	DS	CL(ELEMENTL)
				A new element to add to the Stack

20 POPing an Element from the STACK. (Refer to Figure 8 for the flow diagram.)

	1.	POP	L	R2,TOS	Get the TOS
25	2.	POP1	LTR	R2,R2	Any elements?
	3.		BZ	POPEXIT	No, so exit
	4.		CAL	R2,TOS,R4,NEXT-ELEMENT(R2)	R2&LAR.TOS,R4&LAR.TOS@NEXT
	5.		BC	4,POP1	TOS changed, try again
30	6.	POP2	LR	R3,R4	The pointer to the next element
	7.		SLR	R5,R5	TOS@NEXT will get zero
	8.		CSD	R2,TOS,R4,NEXT-ELEMENT(R2)	Update pointers
35	9.		BC	4,POP1	R2 =TOS, try again
	10.		BC	2,POP2	R4 =Next, try again
	11.		BNE	POP	It didn't work, try again
40	12.	POPEXIT	DS	OH	IF POPed &RAR.R2=Element ELSE R2=0

45 Fig. 8 is a flow chart of removing an element from a LIFO list. In the first step the address of the top of the stack (TOS) is fetched as shown in block 72. In decision block 74 the top of the stack is tested to determine whether it is empty or has a value. If the stack is empty, the POP program is exited at 76 since there is nothing to remove.

However, if the stack is not empty, the Compare and Load (CAL) instruction in block 78 is used to fetch the value of the next pointer from the newest element while making sure that the top of the stack (TOS) does not change. If the TOS had changed, as decided in block 82, the program returns to decision block 74.

50 If the TOS did not change, the program proceeds with the Compare and Swap Disjoint (CSD) instruction as shown in block 86. The TOS replacement value is set to the value of the next pointer which had been fetched by the CAL instruction in block 78. In block 86 the replacement value for the next field is set to zero. While making sure the TOS and the next field do not change, the value of the TOS is replaced with the value of the next pointer and the value of the next pointer is then replaced with zero by the CSD instruction.

55 A decision is made in decision block 79 as to whether the TOS pointer had changed. If the answer is yes, the program returns to decision block 74. If the answer is no, a decision is made in block 84 whether the next pointer had changed. If the answer is yes, the program returns to the Compare and Swap Disjoint

instruction. If the answer from block 84 is no, the POP routine is exited as shown in block 88. The program exits either with zero or the address of the element.

Although the foregoing invention has been particularly shown and described with reference to the preferred embodiment thereof, it will be understood by those skilled in the art that other changes in form  
 5 may be made without departing from the spirit and scope of the invention. For example, the novel instructions can be used on other than IBM System 370 architecture. In addition, the novel instructions may be used in processes and apparatus which perform various methods of data processing.

## 10 Claims

1. A method for comparing and swapping data which are located in discontinuous locations in a data processing system comprising the steps of  
 comparing first and second operands which are located in memory,

15 if said first and second operands are equal, loading the value at a fourth operand into a third operand located in memory,

setting an indicator in memory that the first and second operands are equal, and

performing a serialization process on the second operand location prior to the time the second operand is fetched, whereby a value is fetched from one location in memory dependent on the fact that the value at  
 20 another location does not change.

2. The method as in Claim 1 wherein:

if said first and second operands are unequal, setting the first operand equal to the second operand and setting an indicator in memory that the first and second operands are unequal.

3. The method as in Claim 1 or 2 wherein:

25 if said first and second operands are equal, said third and fourth operands are compared, and

if the second comparison is also equal, access by another user to the second operand or fourth operand locations is prohibited between the moment that the second and fourth operands are fetched for being compared, respectively, and

30 if both comparisons are equal, a first replacement operand is stored at the second operand location and a second replacement operand is stored at the fourth operand location.

4. The method as in Claim 1, 2 or 3 wherein:

if said first and second operands are equal, but the third and fourth operands are unequal, setting the third operand equal to the fourth operand, and

35 setting an indicator in memory for indicating that the third and fourth operands are unequal.

5. The method according to any one of Claims 1 to 4 wherein said data processing system includes a plurality of users each of which may require access to the same data in an addressed location of a data store for the purpose of processing the data, said method being used to add an element to a double-headed FIFO queue by, if the queue is not empty, simultaneously updating the queue tail and the next element pointer of the oldest element to point to the new element, and wherein said first operand is the  
 40 value of the queue tail, said second operand is the location of the queue tail, said third operand is the next element pointer of the oldest element, said fourth operand is the location of the next element pointer of the oldest element, and said first and second replacement operands are the location of the new element.

6. The method as in Claim 5 wherein if the queue is empty, simultaneously updating the queue head and queue tail pointers to point to the new element.

45 7. The method as in Claim 5 or 6 wherein if the queue contains more than one element, simultaneously updating the queue head to point to the second newest element, and the next element pointer of the newest element to zero and, wherein said first operand is the value of the queue head, said second operand is the location of the queue head, said third operand is the next element pointer of the newest element, said fourth operand is the location of the next element pointer of the newest element, and said first and second  
 50 replacement operands are the location of the second newest element.

8. The method according to any one of Claims 1 to 4 wherein said data processing system includes a plurality of users, each of which may require access to the same data in an addressed location of a data store for the purpose of processing the data, said method being used to remove an element from a single-headed LIFO stack by fetching the address of the second newest element on the stack if the stack is not  
 55 empty, and while ensuring the stack does not change, and wherein said first operand is the value of the top-of-stack, said second operand is the location of the top-of-stack, said third operand will contain the value of second element on completion of the fetch, and said fourth operand is the location of the newest element's next element pointer.

9. The method as in Claim 8 wherein, if the stack contains more than one element, simultaneously updating the top-of-stack to point to the second newest element and the next element pointer of the newest element to zero, wherein said third operand is the next element pointer of the newest element, said fourth operand is the location of the next element pointer of the newest element, and said first and second  
5 replacement operands are the location of the second newest element.

10. The method as in Claim 8 or 9 comprising the step of updating the top of the stack to zero if it contains only one element.

11. The method as in Claim 8 or 9 wherein if the stack is empty, returning the value of zero to the user.

10

15

20

25

30

35

40

45

50

55

FIG. 1

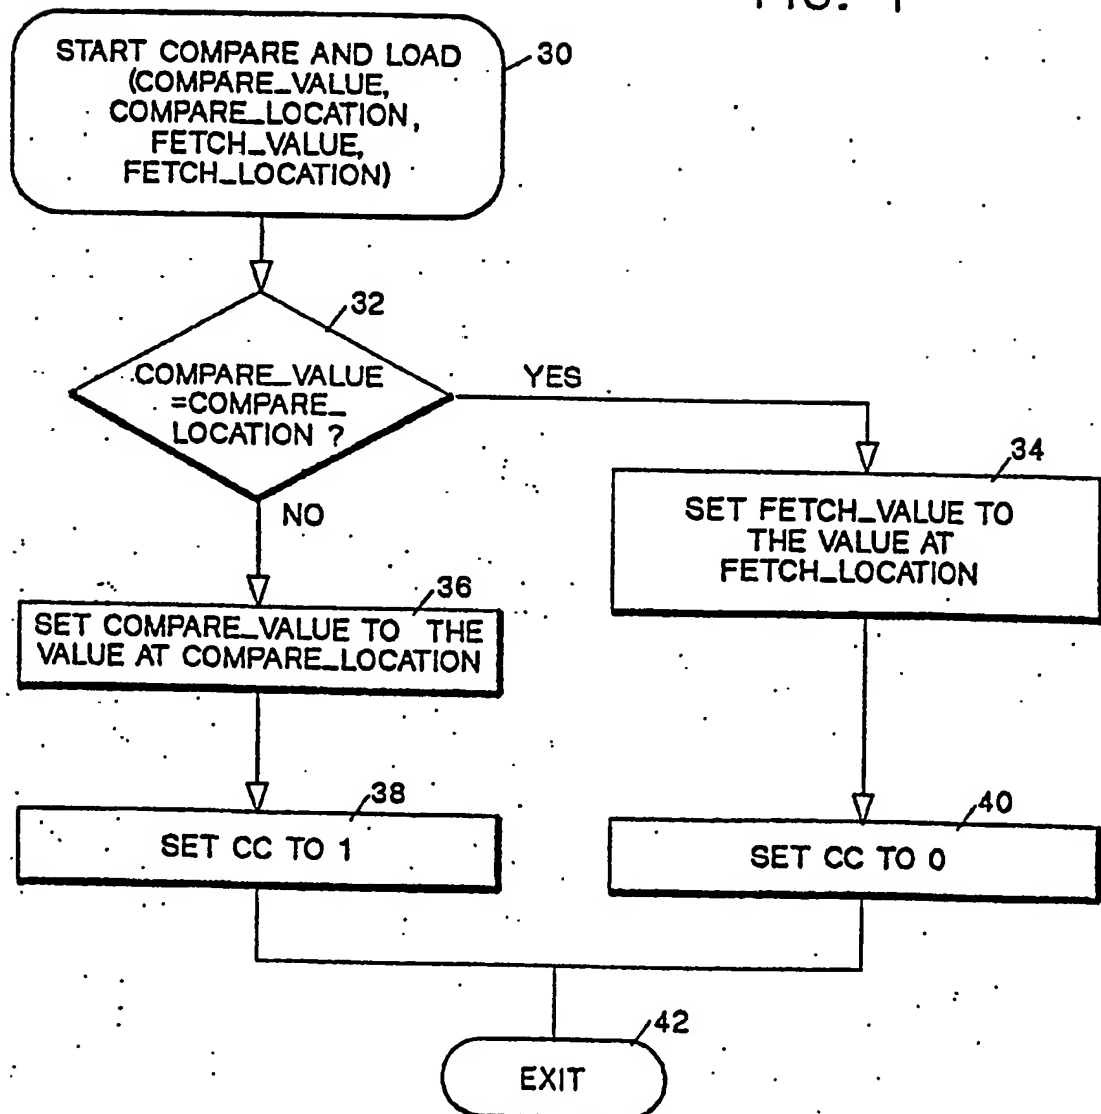
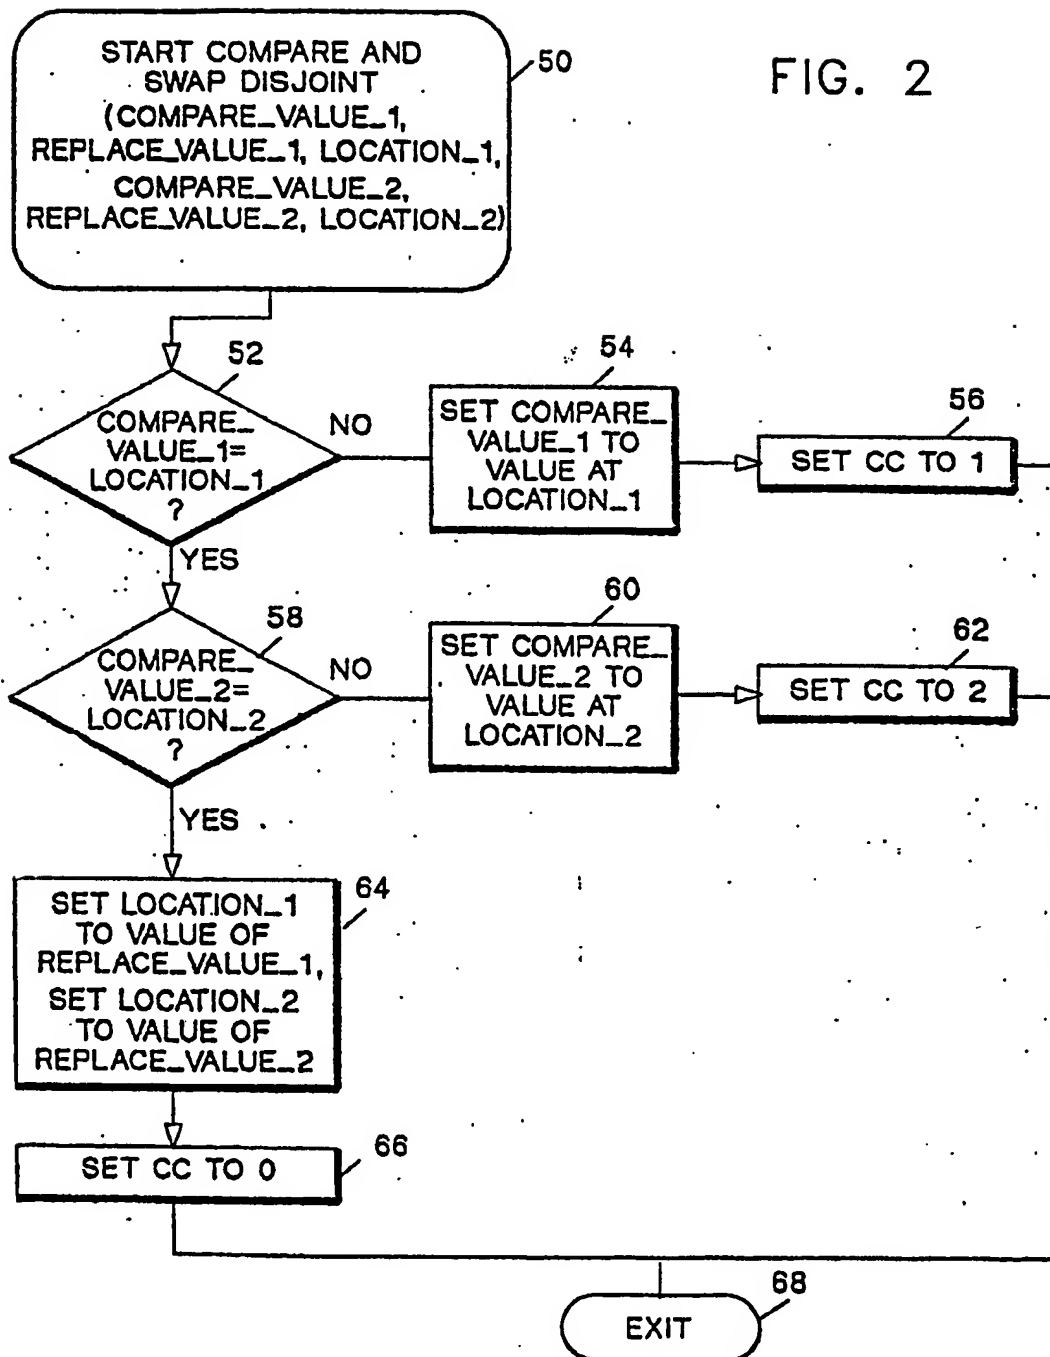
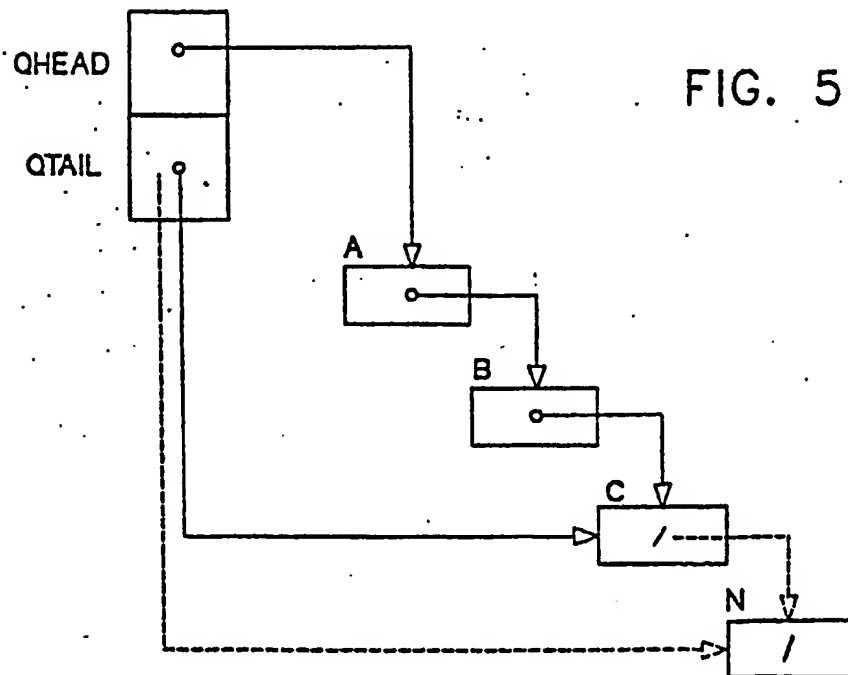
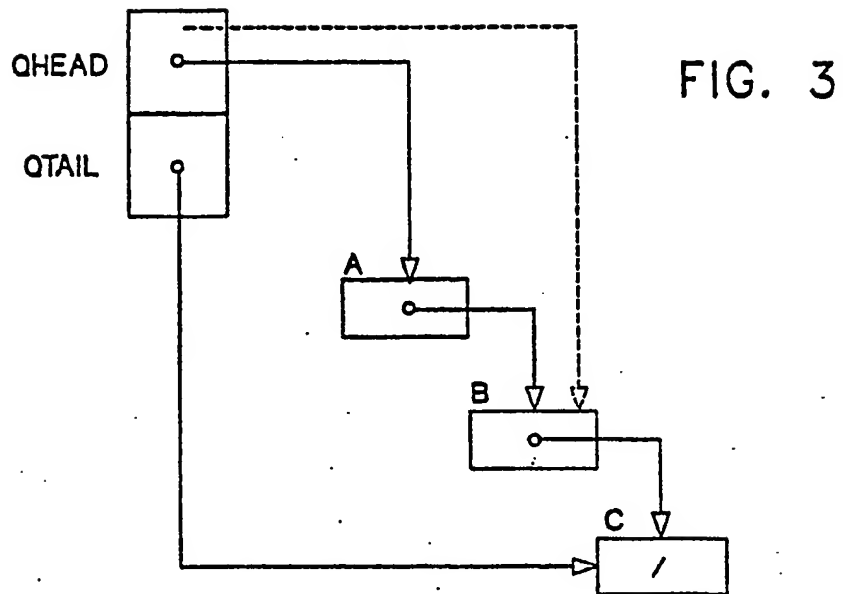
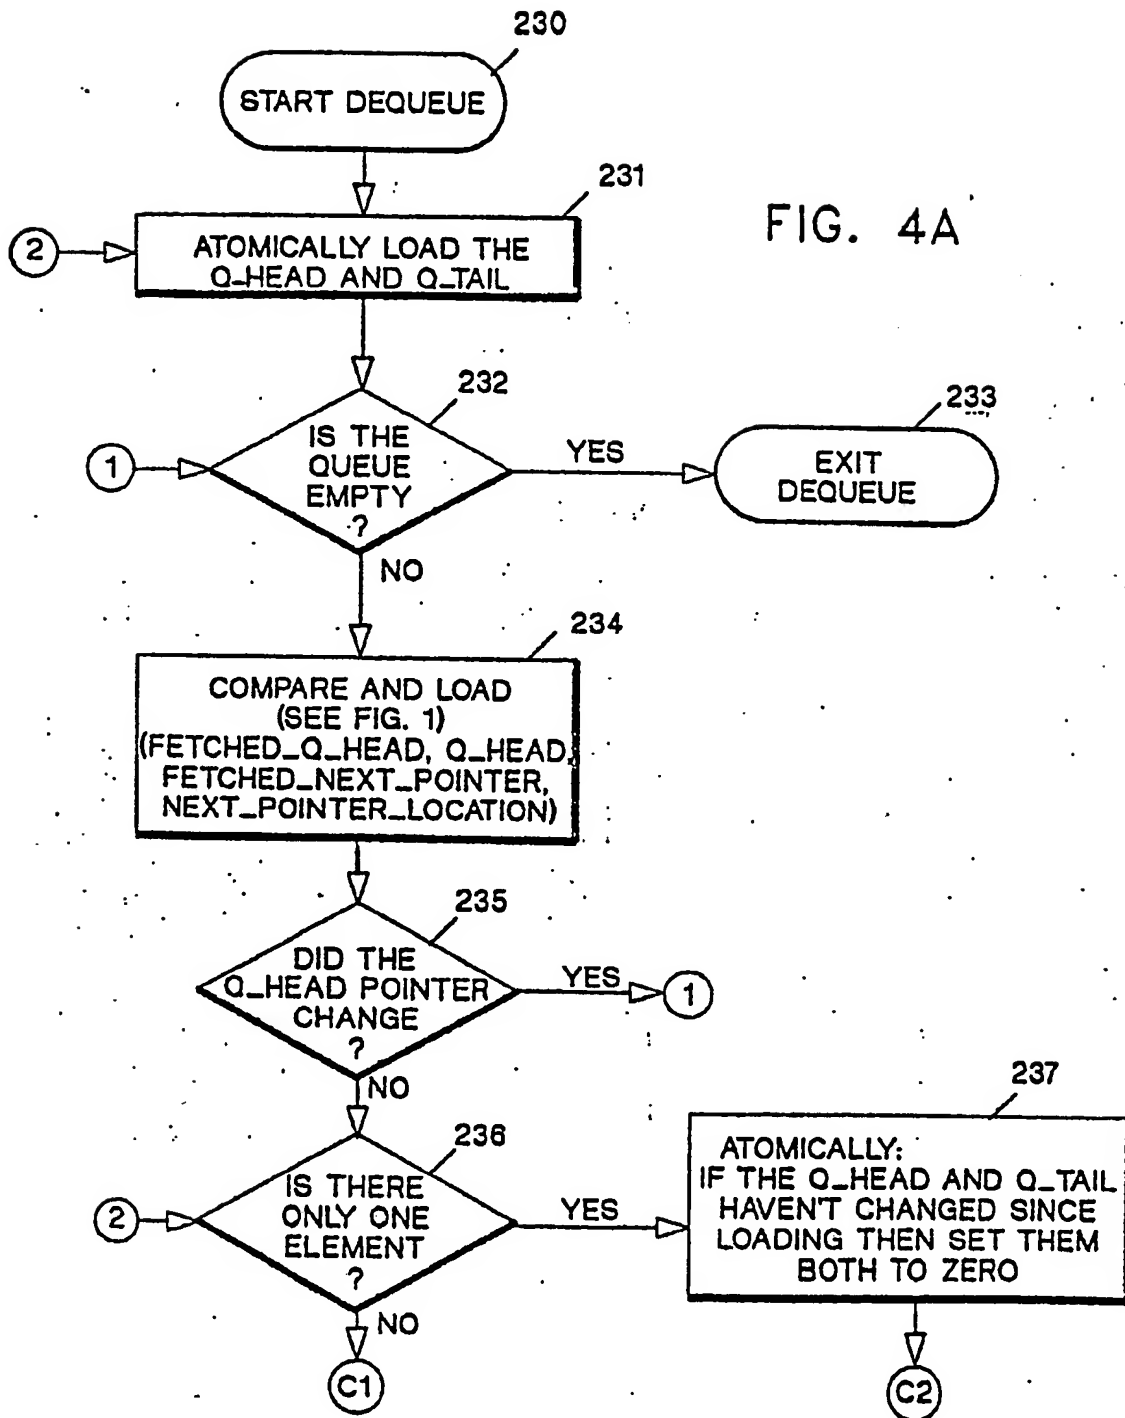


FIG. 2









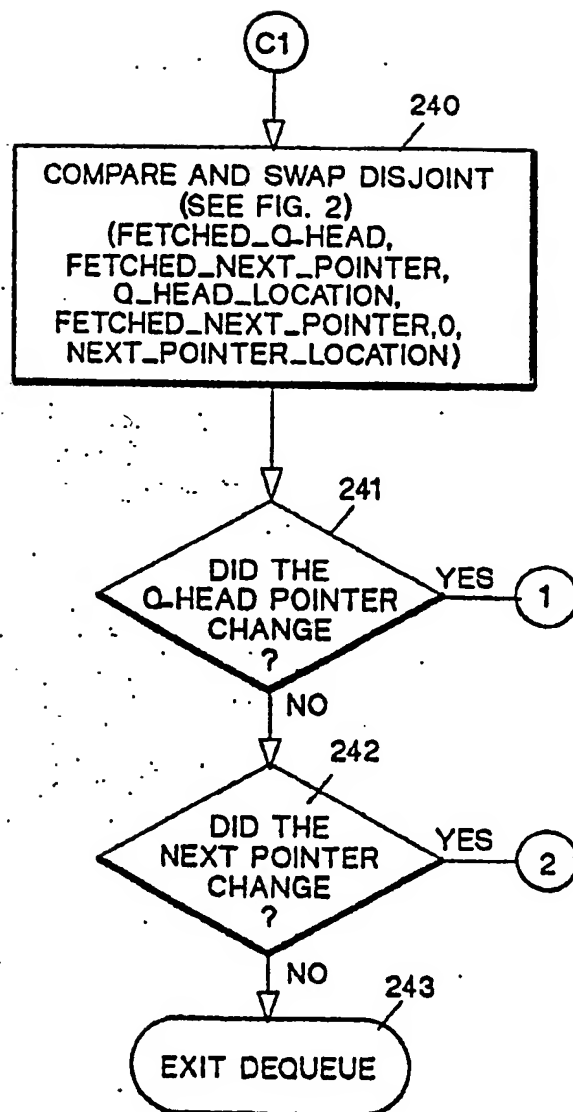


FIG. 4B

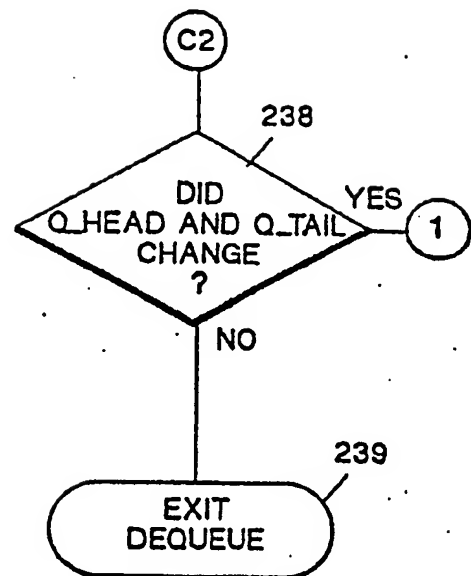
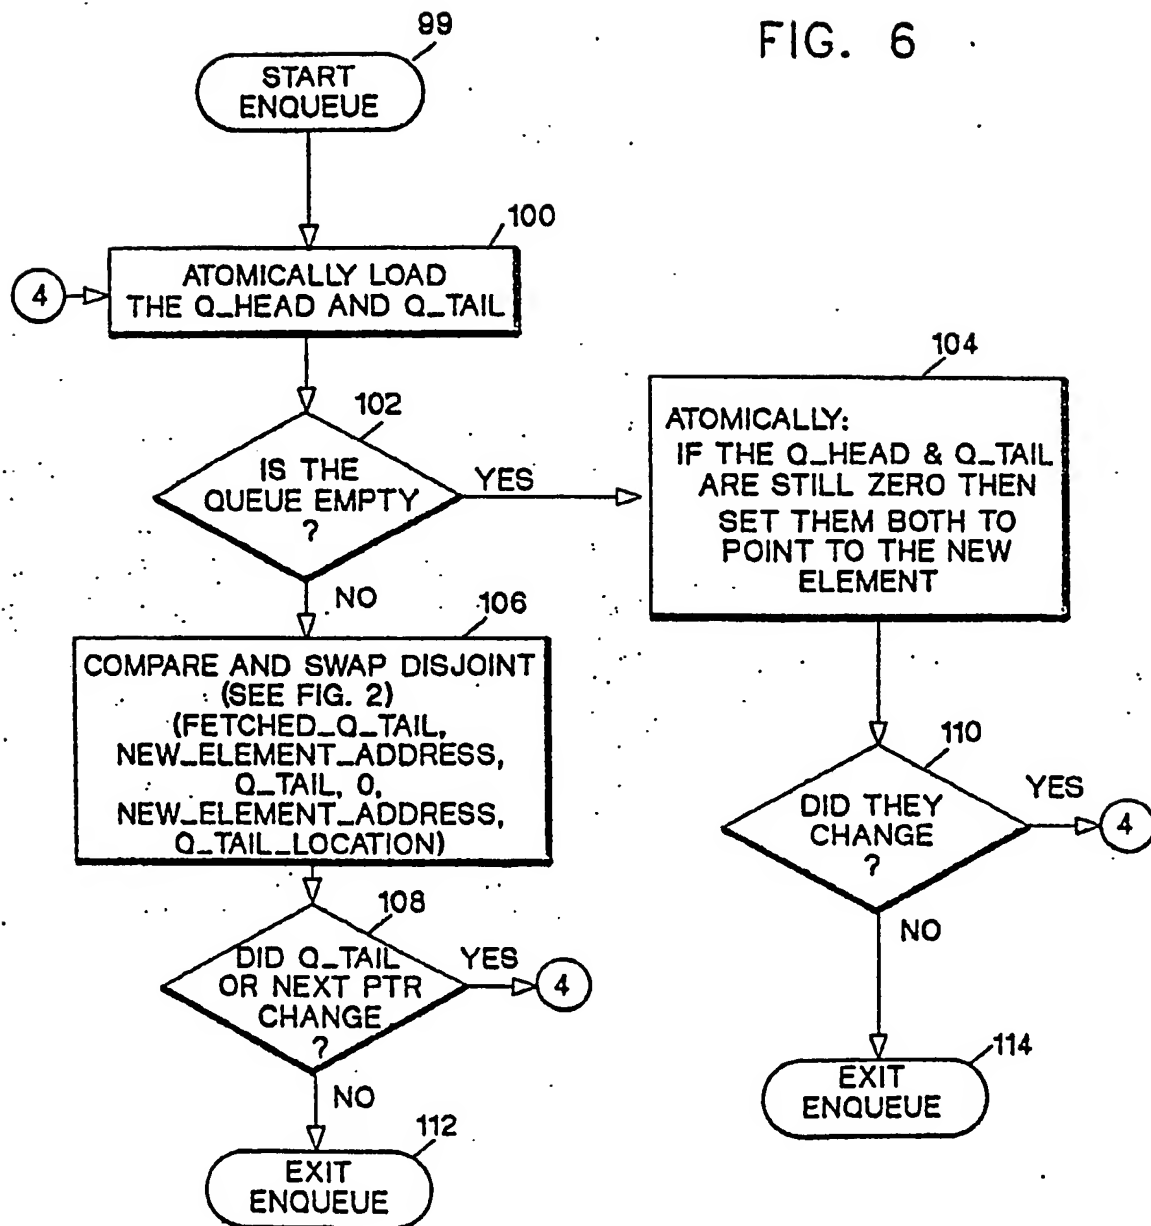


FIG. 6




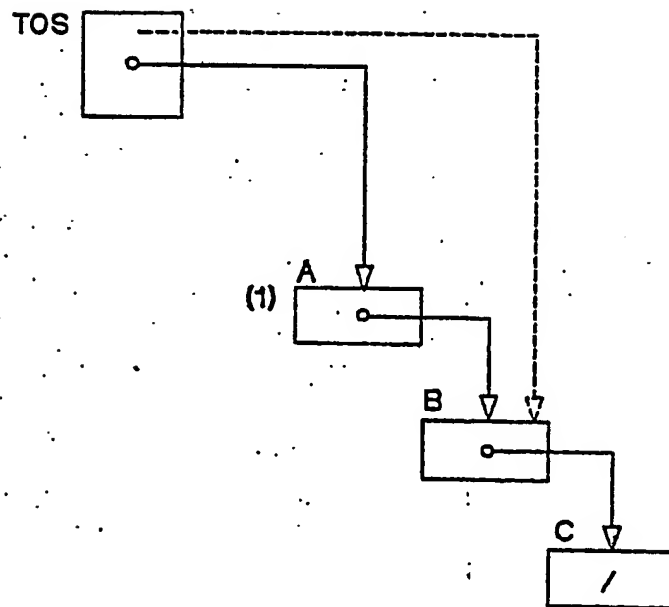


FIG. 7



(19)

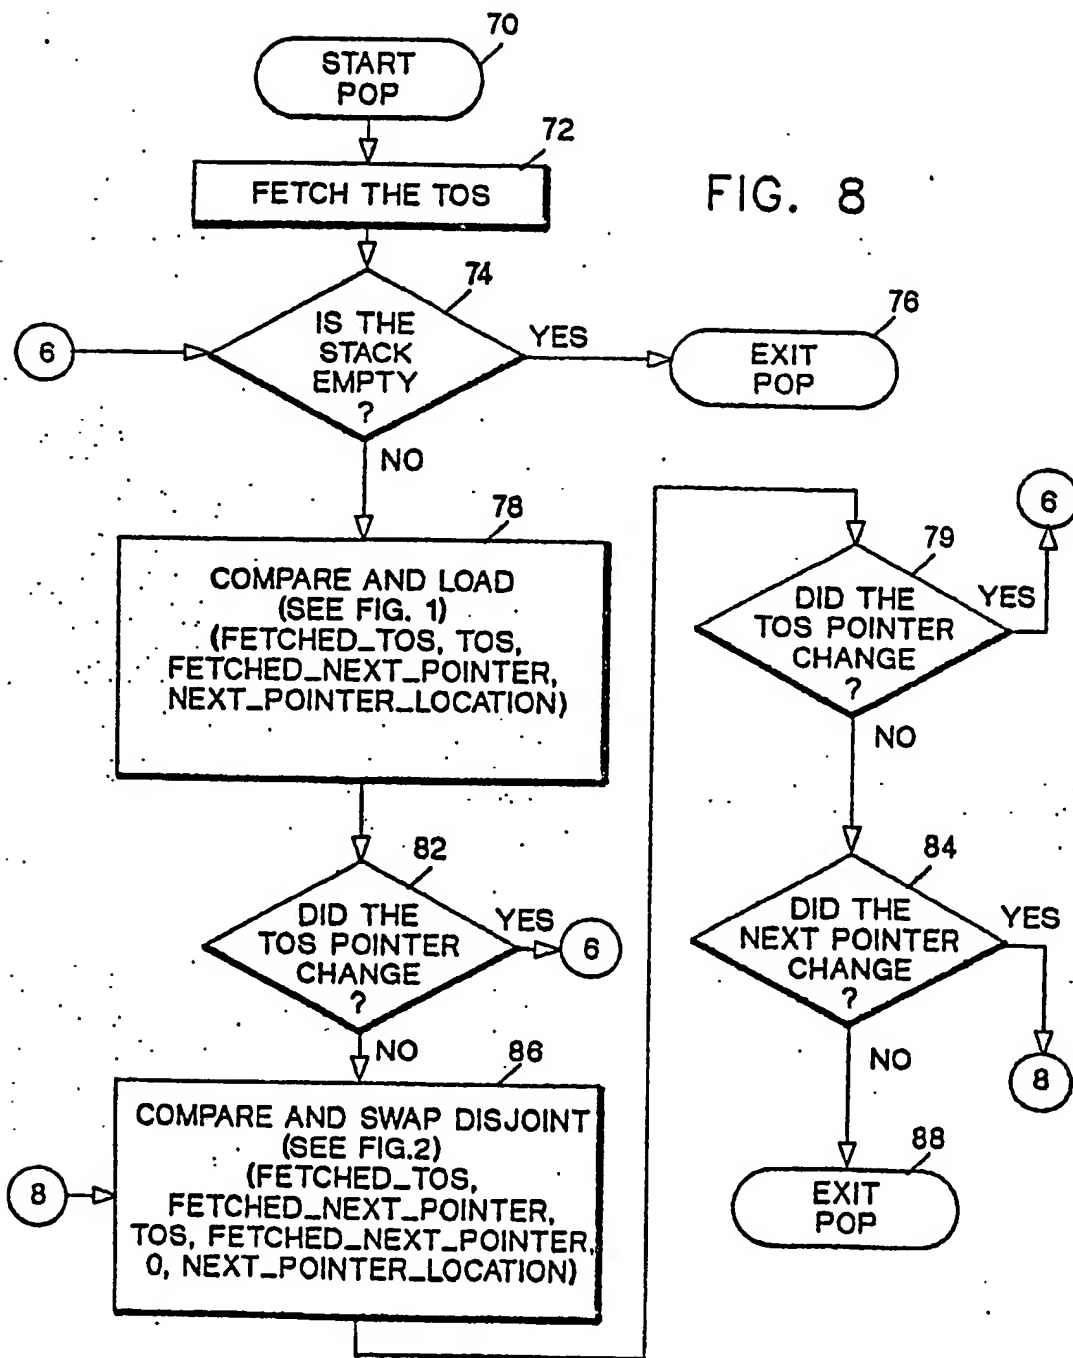

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) Publication number:

**0 366 585 A3**

(12)

## EUROPEAN PATENT APPLICATION

(21) Application number: **89480142.2**

(51) Int. Cl.<sup>5</sup>: **G06F 9/46, G06F 9/30,  
G06F 15/403**

(22) Date of filing: **12.09.89**

(30) Priority: **28.10.88 US 264289**

(43) Date of publication of application:  
**02.05.90 Bulletin 90/18**

(84) Designated Contracting States:  
**DE FR GB**

(86) Date of deferred publication of the search report:  
**03.06.92 Bulletin 92/23**

(71) Applicant: **International Business Machines Corporation**  
**Old Orchard Road**  
**Armonk, N.Y. 10504(US)**

(72) Inventor: **Arnold, Michael Edward**  
**126 Sylvan School Road**  
**Snow Camp, NC 27349(US)**


(74) Representative: **Bonneau, Gérard**  
**Compagnie IBM France Département de**  
**Propriété Industrielle**  
**F-06610 La Gaude(FR)**

(54) **Method for comparing and swapping data in a multi-programma data processing system.**

(57) The method for comparing and swapping data which are located in discontinuous locations in a data processing system, comprises the steps of comparing first and second operands which are located in memory, and if said first and second operands are equal, loading the value at a fourth operand into a third operand located in memory,

then setting an indicator in memory that the first and second operands are equal, and performing a serialization process on the second operand location prior to the time the second operand is fetched, whereby a value is fetched from one location in memory dependent on the fact that the value at another location does not change.

FIG. 1

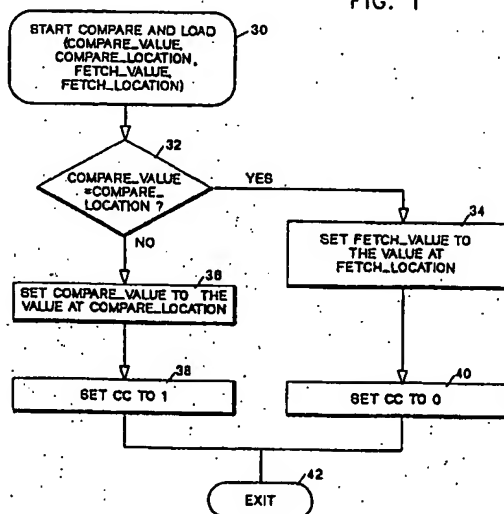

EP 0 366 585 A3



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number

EP 89 48 0142

Page 1

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.5)
X	IBM TECHNICAL DISCLOSURE BULLETIN, vol. 22, no. 9, February 1980, NEW YORK US pages 4297 - 4299; C.J. EVANGELISTI ET AL.: 'Conditional multiple store instruction' * page 4298, line 1 - page 4299, line 9 * * figure 1 *	1-3	G06F9/46 G06F9/30 G06F15/403
A	---	5,7-9	
Y	WESCON TECHNICAL PAPERS 30 October 1986, LOS ANGELES US pages 1 - 16; BOB BEIMS: 'Multiprocessing capabilities of the MC68020 32-bit microprocessor' * page 8, column 2, line 27 - page 9, column 1, line 30; figure 6 *	1-3,5-7	
A	---	8-11	
Y	IBM TECHNICAL DISCLOSURE BULLETIN, vol. 25, no. 1, June 1982, NEW YORK US pages 102 - 105; J.J. LOSQ ET AL.: 'Linklist instruction' * page 104, line 1 - page 105, line 17 *	1-3,5-7	TECHNICAL FIELDS SEARCHED (Int. Cl.5)
A	---		G06F
A	WO-A-8 600 343 (MOTOROLA, INC.) * page 12, line 24 - page 14, line 5 * * page 51, line 1 - page 52, line 13 *	1-3,5,7	
A	IBM TECHNICAL DISCLOSURE BULLETIN, vol. 18, no. 12, May 1976, NEW YORK US page 4110; J.J. SIEGEL: 'Compare double and swap extended instruction' * the whole document *	1-3	
D,A	US-A-3 886 525 (P.J. BROWN ET AL.) * column 2, line 8 - column 2, line 38 * * column 10, line 2 - column 10, line 39 *	1-3	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 08 APRIL 1992	Examiner MICHEL T.G.
<b>CATEGORY OF CITED DOCUMENTS</b>			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons * : member of the same patent family, corresponding document	



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number

EP 89 48 0142  
Page 2

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.5)
			TECHNICAL FIELDS SEARCHED (Int. Cl.5)
The present search report has been drawn up for all claims			
Place of search	Date of completion of the search	Examiner	
THE HAGUE	08 APRIL 1992	MICHEL T. G.	
<b>CATEGORY OF CITED DOCUMENTS</b>			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ..... @ : member of the same patent family, corresponding document	



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☒ BLACK BORDERS

☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES

☒ FADED TEXT OR DRAWING

☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING

☐ SKEWED/SLANTED IMAGES

☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS

☒ GRAY SCALE DOCUMENTS

☐ LINES OR MARKS ON ORIGINAL DOCUMENT

☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**